


K40 Plinth System

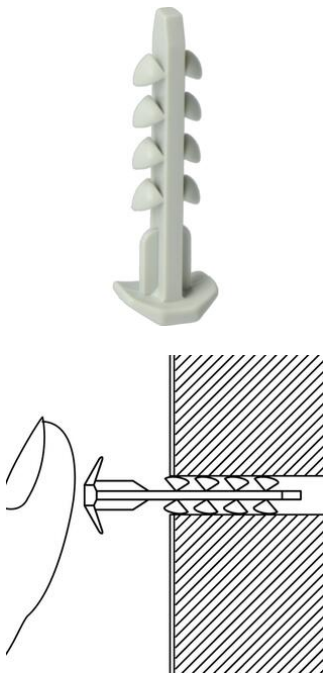

Thumbnail clamping plug

- Quick, screwless mounting of trunking base on a wall.
- Diameter of hole to be drilled in solid gypsum wall: 5 mm

Article no:	AT9118
EAN:	8712259012148
Amount Packaging	100 st.
Ø drilling hole	5 mm
Length	35 mm
Colour	-
Drill hole diameter	5 mm
With edge	Yes
Suitable for calcium silicate brick	Yes
Suitable for cellular concrete	Yes
Suitable for concrete	Yes
Suitable for gas concrete	Yes
Suitable for solid brick	Yes
Push-through installation	No
Pre-positioned installation	No
Spaced installation	No
Mounting thickness	5 mm
Min. drill hole depth	
Material plug	Plastic
Screwing system	None
With screw nail	Yes
Pin shape	Nail
Connecting thread metric	
Dispatch	100

The K40 plinth system has a modern design and includes extremely compact switching devices that lend themselves to the installation of complete surface-mount systems for 230V, low-voltage and data cabling. K40 is easy to mount and install. Thanks to the symmetric cover strip, vertical applications are also possible. It is simple to expand and offers the flexibility of combination with the K25/P25 system. It can also be seamlessly integrated with existing systems. The system is extremely well suited for renovation and changing user requirements. The switching devices can easily be moved. The usable storage area for the wiring remains optimal.

- The K40 system complies with EN 50085-1 and EN 50085-2-1.
- K40 is suitable for installations 16A/250V~.
- Protection class: IP40 (EN 60529).
- Impact resistance: IK07 (EN 50102).
- Minimum temperature for storage and transport: 5 °C.
- Minimum temperature during installation and use: 5 °C.
- Maximum operating temperature: + 60 °C.
- Compartment 1: cross section 350 mm²; maximum number of cables: 2x Ø 10 mm or 1x Ø 13 mm.
- Compartment 2: cross section 640 mm²; maximum number of cables: 3x Ø 10 mm or 2x Ø 13 mm.